

Calbrite™

Stainless Steel Conduit Systems

Stainless Steel Compression Coupling

Features:

- Manufactured in type 316 stainless steel for increased corrosion resistance
- Polished with standard "brite" finish to increase corrosion resistance and aesthetic appearance
- Addition of stainless and plastic ferrule assures weatherproof seal
- Connectors assembled with ferrules, no separate pieces to purchase or stock
- No package qty. required



Certifications and Compliances:


Calbrite stainless steel compression connectors are fabricated to UL standards
NEMA 4X approved

Material:

Body: 316SS
Stainless Ferrule: 316SS
Yellow Ferrule: Nylon

Applications:

Used to join two lengths of stainless light wall conduit, or non-threaded lengths of stainless rigid conduit.

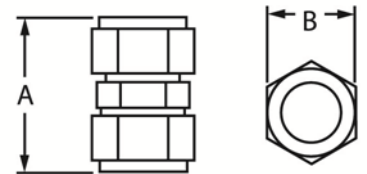

Industries Commonly Served:

- Food & Beverage Production & Distribution
- Chemical Plants
- Water & Wastewater Treatment
- Pharmaceuticals & Cosmetics
- Refining & Extraction Sites
- Petrochemical Operations
- Marine & Coastal Facilities
- Pulp and Paper Mills
- Along with other corrosive environments

Size	Part Number	A	B	I.D.	Wt. ea per lb.
1/2"	S60500CC00	2.310"	1.380"	.850"	0.28
3/4"	S60700CC00	2.220"	1.650"	1.065"	0.42
1"	S61000CC00	2.400"	2.000"	1.330"	0.67
1-1/2"	S61500CC00	3.000"	2.550"	1.930"	1.11
2"	S62000CC00	3.000"	3.120"	2.440"	1.75

*All dimensions are for informational purposes only *Tolerances +/- 5%*