


Calbrite™

Stainless Steel Conduit Systems

Stainless Steel EMT Compression Male Connector

Features:

- Manufactured in type 316 stainless steel for increased corrosion resistance
- Polished with standard "brite" finish to increase corrosion resistance and aesthetic appearance
- Designed for use with stainless EMT conduit
- Addition of stainless and plastic ferrule assures weatherproof seal
- Connectors assembled with ferrules, no separate pieces to purchase or stock
- No package qty. required

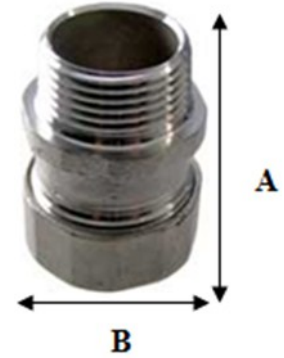

Certifications and Compliances:


Calbrite stainless steel EMT fittings and accessories are fabricated to UL standards NEMA 4X approved

Material:

Body: 316SS
 Stainless Ferrule: 316SS
 Red Ferrule: Nylon

Applications:

Used to join stainless EMT to box, enclosure, or other fittings.

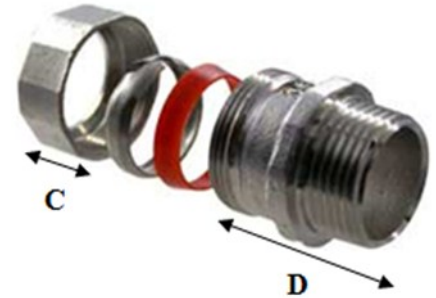

Industries Commonly Served:

- Food & Beverage Production & Distribution
- Chemical Plants
- Water & Wastewater Treatment
- Pharmaceuticals & Cosmetics
- Refining & Extraction Sites
- Petrochemical Operations
- Marine & Coastal Facilities
- Pulp and Paper Mills

Size	Part Number	A	B	C	D	Thread Length	Thread O.D.	Wt. ea per lb.
1/2"	S20500MC00	1.620"	1.050"	.540"	1.260"	.328"	.840"	0.11
3/4"	S20700MC00	1.730"	1.280"	.540"	1.310"	.430"	1.050"	0.16
1"	S21000MC00	1.840"	1.580"	.580"	1.470"	.500"	1.315"	0.23
1-1/4"	S21200MC00	1.850"	1.980"	.570"	1.500"	.520"	1.660"	0.33
1-1/2"	S21500MC00	2.030"	2.240"	.610"	1.675"	.630"	1.900"	0.45
2"	S22000MC00	2.200"	2.750"	.653"	1.820"	.672"	2.375"	0.59

*All dimensions are for informational purposes only *Tolerances +/- 5%*