

# Calbrite™

## Stainless Steel Conduit Systems

### Stainless Steel Tee Condulet

#### Features:

- Manufactured in type 316 stainless steel to meet any stringent sanitary condition
- Polished with standard "brite" finish to increase corrosion resistance and aesthetic appearance
- Solid stainless construction permits easy installation using ordinary hand tools
- The flat back design allows extra wiring capacity
- No package qty. required
- Cover & Gasket set included
- Form 8 Style



#### Certifications and Compliances:

UL514A approved  
UL File Number – E307133

#### Material:


Material: Body CF8M- 316SS  
Gasket - Neoprene  
Cover & Screws: 316SS

#### Applications:

To connect and change direction of conduit runs  
Can be used as pulling fittings  
Accessible wiring chamber provides a spacious location to make splices

#### Industries Commonly Served:

- Food & Beverage Production & Distribution
- Chemical Plants
- Water & Wastewater Treatment
- Pharmaceuticals & Cosmetics
- Refining & Extraction Sites
- Petrochemical Operations
- Marine & Coastal Facilities
- Pulp and Paper Mills
- Along with other corrosive environments

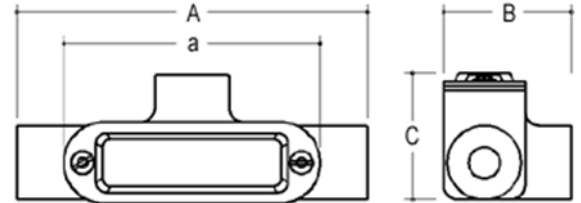

Size	Part Number	A	B	C	a	Cubic Inches	Weight (ea) per lb.
1/2"	S60500TE00	5.620"	2.000"	2.030"	4.320"	5"	1.26
3/4"	S60700TE00	6.200"	2.330"	2.320"	4.940"	9"	1.86
1"	S61000TE00	7.300"	2.650"	2.330"	5.650"	13"	2.50
1-1/4"	S61200TE00	8.520"	3.190"	2.900"	6.530"	24"	3.50
1-1/2"	S61500TE00	9.810"	3.580"	3.000"	7.810"	35"	5.00
2"	S62000TE00	12.30"	4.700"	3.880"	10.00"	77"	9.82
2-1/2"	S62500TE00	15.29"	6.200"	4.550"	12.00"	160"	14.32
3"	S63000TE00	15.33"	6.280"	4.520"	12.00"	177"	15.00
4"	S64000TE00	18.34"	7.610"	5.930"	14.63"	382"	30.00

All dimensions are for informational purposes only \*Tolerances +/- 5%