


STAINLESS STEEL EMT

Features:

- Manufactured in type 304 and 316 stainless steel to meet any stringent sanitary condition
- Polished with standard “brite” finish to increase corrosion resistance and aesthetic appearance
- Calbrite is the exclusive manufacturer of stainless EMT
- Stainless steel EMT requires no threading and is joined together by utilizing Calbrite EMT set screw or compression fittings, providing simplified installations and reduced costs
- Lighter weight provides cost savings on installation and shipping (Weighs 58% less than stainless steel rigid conduit and 43% less than IMC)

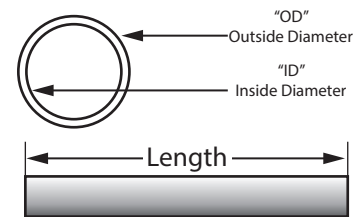

Certifications and Compliances:

- UL / 797A Listed
- UL file Number _ E315441
- Inclusive for installation in accordance with Article 358 of ANSI/NFPA 70
- “National Electrical Code” (NEC)
- NSF/ANSI 169 Certified

Applications:

Stainless steel EMT conduit and fittings combine strength with ductility, resulting in an affordable, lightweight and easy-to-handle conduit assembly. EMT can be installed indoors and outdoors in accordance with UL and NEC® requirements.

| Type 304 Part Number 10' Length | Type 316 Part Number 10' Length | Type 304 Part Number 5' Length | Type 316 Part Number 5' Length | Trade Size (in) | Outside Diameter (in) | Inside Diameter (in) | Weight each per (lb) |
|---------------------------------------|---------------------------------------|--------------------------------------|--------------------------------------|--------------------|-----------------------------|----------------------------|----------------------------|
| S10510CT00 | S20510CT00 | S10505CT00 | S20505CT00 | ½ | 0.706 | 0.622 | 0.300 |
| S10710CT00 | S20710CT00 | S10705CT00 | S20705CT00 | ¾ | 0.922 | 0.824 | 0.580 |
| S11010CT00 | S21010CT00 | S11005CT00 | S21005CT00 | 1 | 1.163 | 1.050 | 0.680 |
| S11210CT00 | S21210CT00 | S11205CT00 | S21205CT00 | 1¼ | 1.510 | 1.380 | 1.000 |
| S11510CT00 | S21510CT00 | S11505CT00 | S21505CT00 | 1½ | 1.740 | 1.610 | 1.100 |
| S12010CT00 | S22010CT00 | S12005CT00 | S22005CT00 | 2 | 2.200 | 2.067 | 1.400 |
| S12510CT00 | S22510CT00 | S12505CT00 | S22505CT00 | 2½ | 2.875 | 2.708 | 2.480 |
| S13010CT00 | S23010CT00 | S13005CT00 | S23005CT00 | 3 | 3.500 | 3.334 | 3.030 |
| S14010CT00 | S24010CT00 | S14005CT00 | S24005CT00 | 4 | 4.500 | 4.334 | 3.920 |

All dimensions are for informational purposes only *Tolerances +/- 5%



For more info visit atkore.com/calbrite