

## STAINLESS STEEL 1-5/8" BACK TO BACK STRUT



### Features:


- Manufactured in both type 304 and 316 stainless to meet any stringent sanitary condition
- Polished to a bright, easily maintainable finish that is modern, attractive, easy to clean, and that also enhances the surface's resistance to pitting and bacterial corrosion
- Calbrite stainless steel strut functions in exactly the same way as any other metallic strut
- Channels provided by Calbrite are available in 12 different basic sizes which are subjected to further variation in gauge and depth

### Certifications and Compliances:

- UL 5B Listed
- For installation in accordance with Article 384 of ANSI/NFPA 70, National Electrical Code (NEC)

### Applications:

The Calbrite system of metal framing is based on the use of a continuous slotted channel, and a series of brackets and fittings, which can be fastened to it any point. With Calbrite channel and components, racks, supports for conduit, wiring, electrical equipment, machine frames, and a limitless variety of structures can be built rapidly, simply and economically.

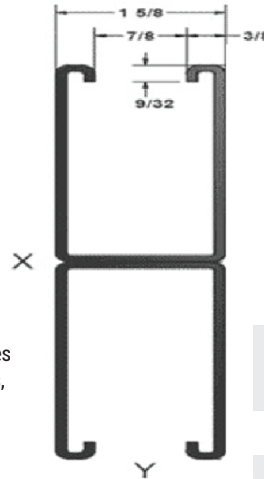

### Industries Commonly Served:

- Food & Beverage Production
- Marine & Coastal Facilities
- Chemical Plants
- Water & Wastewater Treatment
- Pharmaceuticals & Cosmetics
- Refining & Extraction Sites
- Petrochemical Operations
- Pulp & Paper Mills
- Along with other corrosive environments

Type 304 Part Number Slotted	Type 316 Part Number Slotted	Size	Overall Height	Sectional Area	Weight each per L.F.
S45810SB58	S65810SB58	1 - 5/8"	3 - 1/4"	1.118 sq. in.	3.40 lbs.

Type 304 Part Number Solid	Type 316 Part Number Solid	Size	Overall Height	Sectional Area	Weight each per L.F.
S45810SBL5	S65810SBL5	1 - 5/8"	3 - 1/4"	1.118 sq. in.	3.80 lbs.

*All dimensions are for informational purposes only \*Tolerances +/- 5%*