




STAINLESS STEEL THREE PIECE COUPLINGS


Features:

- Manufactured in type 316 stainless steel to meet any stringent sanitary condition
- Polished with standard "brite" finish to increase corrosion resistance and aesthetic appearance
- Designed for use with stainless threaded conduit
- Machined tapered female threads for smooth bore inside diameter
- No package qty. required




Certifications and Compliances:

- •UL / cUL 514B Listed
- UL file number – E308159
- Intended to be installed in accordance with ANSI/NFPA 70, National Electrical Code" (NEC)

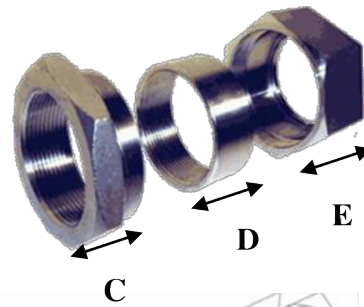

Applications:

To join and connect threaded ends of stainless conduit where neither length of conduit can be turned.

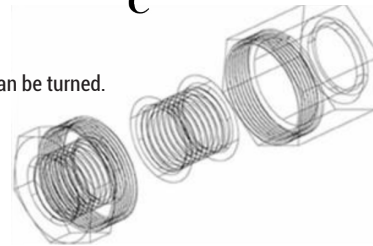

Industries Commonly Served:

- Food & Beverage Production
- Marine & Coastal Facilities
- Chemical Plants
- Water & Wastewater Treatment
- Pharmaceuticals & Cosmetics
- Refining & Extraction Sites
- Petrochemical Operations
- Pulp & Paper Mills
- Along with other corrosive environments

Part Number	Size	A	B	C	D	E	Female Thread I.D.	Weight each per lb
S605003U00	1/2"	1.535"	1.680"	0.800"	0.750"	1.240"	.840"	0.45
S607003U00	3/4"	1.800"	1.750"	0.825"	0.770"	1.300"	1.050"	0.60
S610003U00	1"	2.143"	2.130"	1.000"	0.975"	1.553"	1.315"	0.98
S612003U00	1-1/4"	2.540"	2.160"	1.030"	0.985"	1.590"	1.660"	1.18
S615003U00	1-1/2"	2.870"	2.161"	1.030"	0.985"	1.600"	1.900"	1.50
S620003U00	2"	3.525"	2.200"	1.040"	1.000"	1.630"	2.375"	2.27
S625003U00	2-1/2"	3.400"	3.720"	1.580"	1.560"	2.950"	2.875"	2.50
S630003U00	3"	4.070"	3.800"	1.610"	1.610"	3.100"	3.500"	3.28
S640003U00	4"	5.250"	4.110"	1.850"	1.750"	3.200"	4.500"	6.35

All dimensions are for informational purposes only *Tolerances +/- 5%