

STAINLESS STEEL EMT COMPRESSION MALE CONNECTOR



Features:


- Manufactured in type 316 stainless steel for increased corrosion resistance
- Polished with standard "brite" finish to increase corrosion resistance and aesthetic appearance
- Designed for use with stainless EMT conduit
- Addition of stainless and plastic ferrule assures weatherproof seal
- Connectors assembled with ferrules, no separate pieces to purchase or stock
- No package qty. required

Certifications and Compliances:

- Calbrite stainless steel EMT fittings and accessories are fabricated to UL standards.
- NEMA 4X approved.

Material:

Body: 316SS
Stainless Ferrule: 316SS
Red Ferrule: Nylon

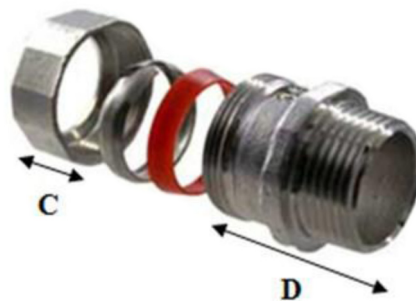

Applications:

Used to join stainless EMT to box, enclosure or other fittings.

Industries Commonly Served:

- Food & Beverage Production
- Marine & Coastal Facilities
- Chemical Plants
- Water & Wastewater Treatment
- Pharmaceuticals & Cosmetics
- Refining & Extraction Sites
- Petrochemical Operations
- Pulp & Paper Mills

Part Number	Size	A	B	C	D	Thread Length	Thread O.D	Weight each per lb
S20500MC00	1/2"	1.620"	1.050"	0.540"	1.260"	0.328"	0.840"	0.16
S20700MC00	3/4"	1.700"	1.250"	0.535"	1.310"	0.430"	1.050"	0.20
S21000MC00	1"	1.800"	1.550"	0.565"	1.470"	0.500"	1.315"	0.23
S21200MC00	1-1/4"	1.850"	1.940"	0.575"	1.500"	0.520"	1.660"	0.33
S21500MC00	1-1/2"	2.050"	2.250"	0.610"	1.675"	0.630"	1.900"	0.43
S22000MC00	2"	2.140"	2.750"	0.660"	1.820"	0.672"	2.375"	0.58

All dimensions are for informational purposes only *Tolerances +/- 5%