

# STAINLESS STEEL EMT MALE COMPRESSION CONNECTORS

## Features:

- Manufactured in type 316 stainless steel for increased corrosion resistance
- Polished with standard “brite” finish to increase corrosion resistance and aesthetic appearance
- Designed for use with stainless EMT conduit
- Addition of stainless and plastic ferrules assures weatherproof seal
- Connectors assembled with ferrules, no separate pieces to purchase or stock
- No package quantity required

## Certifications and Compliances:



- NEMA 4X approved

## Materials:

- Body: 316SS
- Stainless Ferrule: 316SS
- Red Ferrule: Plastic

## Applications:

Used to join stainless EMT to box, enclosure or other fittings.  
Used to join two lengths of stainless EMT.

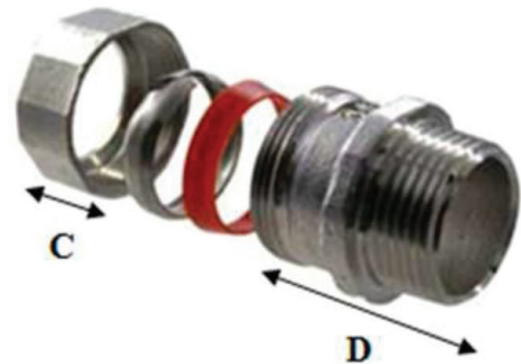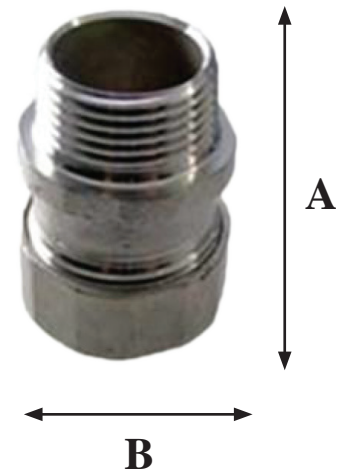

Part Number	Trade Size (in)	A (in)	B (in)	C (in)	D (in)	Thread Length (in)	Thread OD (in)	Weight per each (lb)
S20500MC00	½	1.620	1.050	0.540	1.260	0.328	0.840	0.16
S20700MC00	¾	1.700	1.250	0.535	1.310	0.430	1.050	0.20
S21000MC00	1	1.800	1.550	0.565	1.470	0.500	1.315	0.23
S21200MC00	1¼	1.850	1.940	0.575	1.500	0.520	1.660	0.33
S21500MC00	1½	2.050	2.250	0.610	1.675	0.630	1.900	0.43
S22000MC00	2	2.140	2.750	0.660	1.820	0.672	2.375	0.58
S22500MC00	2½	2.950	3.390	0.700	2.400	1.190	2.800	1.22
S23000MC00	3	3.180	4.140	0.780	2.590	1.220	2.420	1.95
S24000MC00	4	3.350	5.150	0.790	2.690	1.310	4.420	2.72

All dimensions are for informational purposes only \*Tolerances +/- 5%

