

# STAINLESS STEEL EMT MALE COMPRESSION COUPLINGS

## Features:

- Manufactured in type 316 stainless steel for increased corrosion resistance
- Polished with standard “brite” finish to increase corrosion resistance and aesthetic appearance
- Designed for use with stainless EMT conduit
- Addition of stainless and plastic ferrule assures weatherproof seal
- Connectors assembled with ferrules, no separate pieces to purchase or stock
- No package quantity required

## Certifications and Compliances:


- NEMA 4X approved
- NSF/ANSI 169 Certified

## Materials:

- Body: 316SS
- Stainless Ferrule: 316SS
- Red Ferrule: Plastic

## Applications:

Used to join stainless EMT to box, enclosure or other fitting  
Used to join two lengths of stainless EMT.

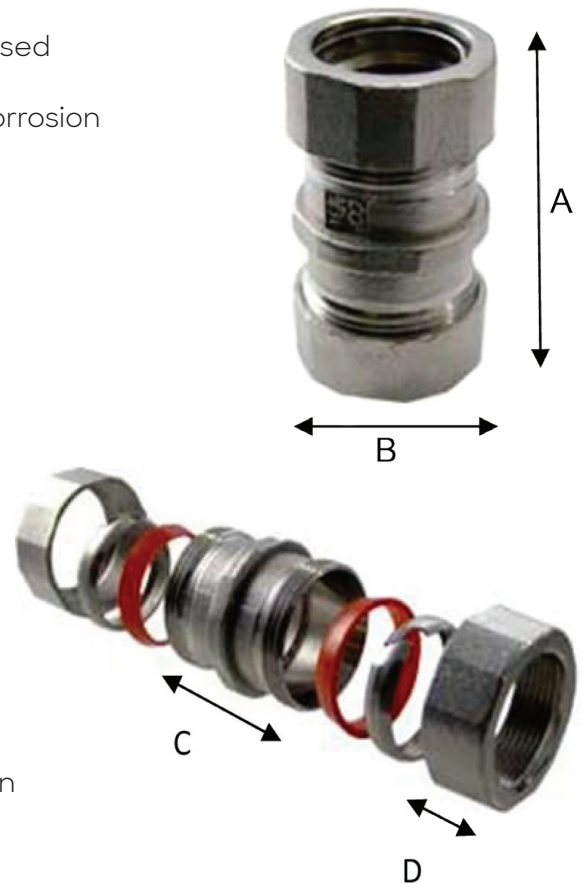

Part Number	Trade Size (in)	A (in)	B (in)	C (in)	D (in)	OD (in)	Weight per each (lb)
S20500CC00	½	2.075	1.050	1.350	0.540	0.706	0.16
S20700CC00	¾	2.100	1.250	1.350	0.540	0.922	0.20
S21000CC00	1	2.200	1.550	1.500	0.570	1.163	0.30
S21200CC00	1¼	2.500	1.930	1.770	0.570	1.510	0.48
S21500CC00	1½	2.600	2.250	1.900	0.600	1.740	0.60
S22000CC00	2	2.770	2.750	2.125	0.650	2.200	0.86
S22500CC00	2½	3.450	3.390	2.360	0.710	2.870	1.55
S23000CC00	3	3.420	4.160	2.510	0.820	3.500	2.53
S24000CC00	4	3.600	5.150	2.510	0.800	4.540	3.24

All dimensions are for informational purposes only \*Tolerances +/- 5%

