


STAINLESS STEEL RIGID CONDUIT

Features:

- Manufactured in type 304L and 316L stainless steel to meet the demands of any corrosive environment
- Polished with standard “brite” finish to increase corrosion resistance and aesthetic appearance
- Calbrite stainless steel rigid conduit is installed in the same way as any other metallic conduit; there are none of the labor-intensive procedures that come with PVC-coated installations, nor the complicated maintenance and repair procedures
- Standard NPT threads allow for trouble-free installations
- Approx. Heat Tolerance = -150°F to 1600°F
- Includes one coupling with each length purchased

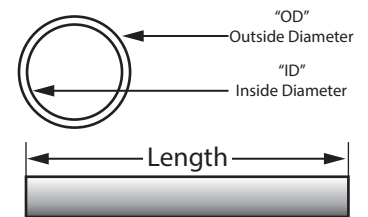

Certifications and Compliances:

- UL/cUL 6A Listed
- UL File # E230584
- Article 344, National Electrical Code (NEC)
- CSA C22.1
- Canadian Electrical Code (CEC), Part 1, Standard for Electrical Installations
- NSF/ANSI 169 Certified

Applications:

Stainless conduit is specified in corrosive applications that exceed the limitations of aluminum, fiberglass, rigid steel, PVC, and PVC coated conduit. Calbrite’s Type 304 and 316 UL-listed stainless steel conduit meets and exceeds current requirements for wash down and harsh/corrosive environments and satisfies the strictest mandates for plant cleanliness by various state agencies and hundreds of common regulatory requirements.



| Type 304 Part Number | Type 316 Part Number | Trade Size (in) | Outside Diameter (in) | Inside Diameter (in) | Threads per inch | Length w/o Coupling (ft in) | Weight per foot (lb) |
|----------------------|----------------------|-----------------|-----------------------|----------------------|------------------|-----------------------------|----------------------|
| S40510CT00 | S60510CT00 | ½ | 0.840 | 0.622 | 14 | 9' 11¼ | 0.820 |
| S40710CT00 | S60710CT00 | ¾ | 1.050 | 0.824 | 14 | 9' 11¼ | 1.090 |
| S41010CT00 | S61010CT00 | 1 | 1.315 | 1.049 | 11.5 | 9' 11 | 1.610 |
| S41210CT00 | S61210CT00 | 1¼ | 1.660 | 1.380 | 11.5 | 9' 11 | 2.180 |
| S41510CT00 | S61510CT00 | 1½ | 1.900 | 1.610 | 11.5 | 9' 11 | 2.630 |
| S42010CT00 | S62010CT00 | 2 | 2.375 | 2.067 | 11.5 | 9' 11 | 3.500 |
| S42510CT00 | S62510CT00 | 2½ | 2.875 | 2.469 | 8 | 9' 10½ | 5.590 |
| S43010CT00 | S63010CT00 | 3 | 3.500 | 3.068 | 8 | 9' 10½ | 7.270 |
| S44010CT00 | S64010CT00 | 4 | 4.500 | 4.026 | 8 | 9' 10¼ | 10.080 |
| S45010CT00 | S65010CT00 | 5 | 5.563 | 5.073 | 8 | 9' 10 | 14.610 |
| S46010CT00 | S66010CT00 | 6 | 6.625 | 6.093 | 8 | 9' 10 | 18.970 |

All dimensions are for informational purposes only *Tolerances +/- 5%

