

STAINLESS STEEL SPECIAL RADIUS 90° SWEEPS

Features:

- Manufactured in both type 304L and 316L stainless steel to meet any stringent sanitary condition
- Polished with standard “brite” finish to increase corrosion resistance and aesthetic appearance
- Available in 90, 60, 45, and 30 degree bends

Applications:


Calbrite stainless steel Elbows and Sweeps are available in special radius dimensions and in various degrees as required. All elbows are manufactured from Calbrite stainless steel conduit and meet all applicable standards

Standards:

- UL / cUL 6A Listed
- UL file # E230584
- Article 344 National Electrical Code (NEC) compliant
- CSA 22.1 - Canadian Electrical Code (CEC) compliant

Options:

- Available in any degree of bend from 5° to 90°, and special radius

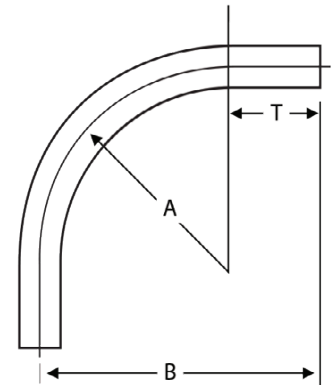

A Trade Size (in)	12 Inch Radius					18 Inch Radius				
	Type 304 Part Number	Type 316 Part Number	B (in)	T (in)	Weight per Each (lb)	Type 304 Part Number	Type 316 Part Number	B (in)	T (in)	Weight per Each (lb)
½	S40512SW90	S60512SW90	21	10	3.00	S40518SW90	S60518SW90	28	11	3.50
¾	S40712SW90	S60712SW90	21	10	4.00	S40718SW90	S60718SW90	28	11	4.75
1	S41012SW90	S61012SW90	21	10	5.75	S41018SW90	S61018SW90	28	11	7.00
1¼	S41212SW90	S61212SW90	21	10	7.70	S41218SW90	S61218SW90	28	11	9.50
1½	S41512SW90	S61512SW90	21	10	9.50	S41518SW90	S61518SW90	28	11	11.50
2	—	—	—	—	—	S42018SW90	S62018SW90	28	11	15.25
2½	—	—	—	—	—	S42518SW90	S62518SW90	28	11	24.00
3	—	—	—	—	—	S43018SW90	S63018SW90	28	11	31.50
4	—	—	—	—	—	—	—	—	—	—

All dimensions are for informational purposes only *Tolerances +/- 5%



STAINLESS STEEL SPECIAL RADIUS 90° SWEEPS

A Trade Size (in)	24 Inch Radius					30 Inch Radius				
	Type 304 Part Number	Type 316 Part Number	B (in)	T (in)	Weight per Each (lb)	Type 304 Part Number	Type 316 Part Number	B (in)	T (in)	Weight per Each (lb)
½	S40524SW90	S60524SW90	35	11	4.00	S40530SW90	S60530SW90	41	11	5.00
¾	S40724SW90	S60724SW90	35	11	5.50	S40730SW90	S60730SW90	41	11	6.50
1	S41024SW90	S61024SW90	35	11	8.00	S41030SW90	S61030SW90	41	11	9.50
1¼	S41224SW90	S61224SW90	35	11	11.00	S41230SW90	S61230SW90	41	11	12.75
1½	S41524SW90	S61524SW90	35	11	13.50	S41530SW90	S61530SW90	41	11	15.50
2	S42024SW90	S62024SW90	35	11	18.00	S42030SW90	S62030SW90	41	11	21.00
2½	S42524SW90	S62524SW90	35	11	28.50	S42530SW90	S62530SW90	41	11	33.00
3	S43024SW90	S63024SW90	35	11	37.00	S43030SW90	S63030SW90	41	11	42.00
4	S44024SW90	S64024SW90	35	11	51.00	S44030SW90	S64030SW90	41	11	59.00

A Trade Size (in)	36 Inch Radius					42 Inch Radius				
	Type 304 Part Number	Type 316 Part Number	B (in)	T (in)	Weight per Each (lb)	Type 304 Part Number	Type 316 Part Number	B (in)	T (in)	Weight per Each (lb)
½	S40536SW90	S60536SW90	47	11	5.50	S40542SW90	S60542SW90	64	12	6.00
¾	S40736SW90	S60736SW90	47	11	7.25	S40742SW90	S60742SW90	64	12	8.00
1	S41036SW90	S61036SW90	47	11	10.75	S41042SW90	S61042SW90	64	12	12.00
1¼	S41236SW90	S61236SW90	47	11	14.50	S41242SW90	S61242SW90	64	12	16.50
1½	S41536SW90	S61536SW90	47	11	17.50	S41542SW90	S61542SW90	64	12	19.75
2	S42036SW90	S62036SW90	47	11	23.50	S42042SW90	S62042SW90	64	12	26.25
2½	S42536SW90	S62536SW90	47	11	38.00	S42542SW90	S62542SW90	64	12	42.00
3	S43036SW90	S63036SW90	47	11	49.00	S43042SW90	S63042SW90	64	12	54.50
4	S44036SW90	S64036SW90	47	11	67.00	S44042SW90	S64042SW90	64	12	76.00

A Trade Size (in)	48 Inch Radius					60 Inch Radius				
	Type 304 Part Number	Type 316 Part Number	B (in)	T (in)	Weight per Each (lb)	Type 304 Part Number	Type 316 Part Number	B (in)	T (in)	Weight per Each (lb)
½	S40548SW90	S60548SW90	68	12	6.75	S40560SW90	S60560SW90	72	12	8.25
¾	S40748SW90	S60748SW90	68	12	9.00	S40760SW90	S60760SW90	72	12	11.00
1	S41048SW90	S61048SW90	68	12	13.25	S41060SW90	S61060SW90	72	12	16.00
1¼	S41248SW90	S61248SW90	68	12	18.00	S41260SW90	S61260SW90	72	12	22.00
1½	S41548SW90	S61548SW90	68	12	22.00	S41560SW90	S61560SW90	72	12	27.00
2	S48048SW90	S62048SW90	68	12	29.00	S42060SW90	S62060SW90	72	12	35.00
2½	S42548SW90	S62548SW90	68	12	46.00	S62560SW90	S62560SW90	72	12	56.00
3	S43048SW90	S63048SW90	68	12	60.00	S43060SW90	S63060SW90	72	12	73.00
4	S44048SW90	S64048SW90	68	12	84.00	S44060SW90	S64060SW90	72	12	101.00

All dimensions are for informational purposes only *Tolerances +/- 5%



For more info visit atkore.com/calbrite

